

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



550172

(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/093521 A2

(51) International Patent Classification: Not classified

(21) International Application Number: PCT/US2004/008238

(22) International Filing Date: 18 March 2004 (18.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 60/459,144 31 March 2003 (31.03.2003) US

(71) Applicant (for all designated States except US): EXXONMOBIL UPSTREAM RESEARCH COMPANY [US/US]; P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): DEFFENBAUGH, Max [US/US]; 14822 Flowerwood Drive, Houston TX 77062 (US). HOYAL, David, C. [AU/US]; 6010 Kirby Drive, Houston, TX 77005 (US). ADAIR, Neal, L. [US/US]; 4134 Foxbrush Lane, Sugar Land, TX 77479 (US). HUH, Chun [US/US]; 7510 Stonecliff Drive, Austin, TX 78731 (US).

(74) Agents: KATZ, Gary, P. et al.; ExxonMobil Upstream Research Company, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(Continued on next page)

(54) Title: METHOD TO DETERMINE PROPERTIES OF A SEDIMENTARY BODY FROM THICKNESS AND GRAIN SIZE DISTRIBUTION AT A POINT WITHIN THE BODY

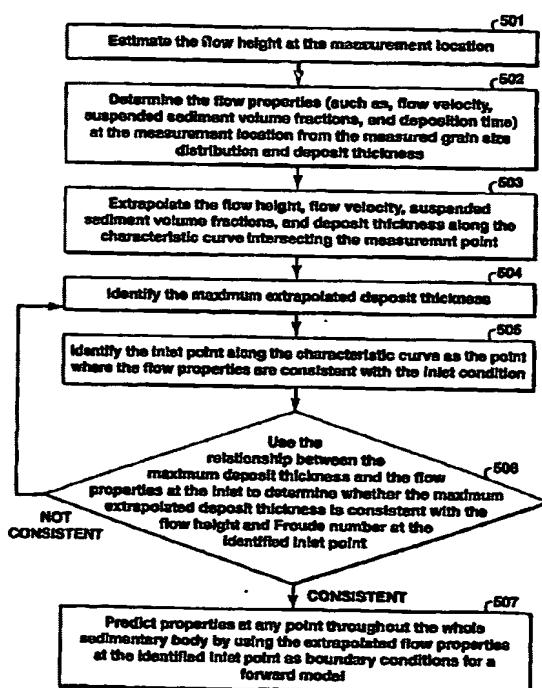

(57) Abstract: A method to determine the properties of a water-lain sediment body from a measurement of grain size distribution and deposit thickness at one location in the body is disclosed. In one embodiment, the method comprises (a) determining the flow properties at the measured location, (b) extrapolating the flow properties back to the inlet through which the depositing flow was emitted, (c) determining at least one property of the water-lain sediment throughout the sediment body by modeling the flow properties using the extrapolated flow properties at the inlet from step (b) as a boundary condition. The flow properties associated with the sediment body include flow velocity, suspended sediment volume fractions, deposition time, and flow height. The properties of the water-lain sediments include, in addition to the flow properties associated with deposition of the sediments, the thickness of the sediment body, the size of the body, the shape of the body, and the grain size distribution at each point within the body.

WO 2004/093521 A2

BEST AVAILABLE COPY